



# Dimensions

Dimensions entrance matting is optimised for dirt scraping and moisture absorption. The mat consists of a combination of coarse and soft yarns.

Dimensions is suitable for commercial premises and also medium-sized and large buildings. It works best in heavily used entrance areas, stairwells, pantries and lifts.


The mat features a bouclé construction. In this kind of composition the pile material is formed out of looped pile. Combined with the blended design this makes small patches of dirt invisible. The strong and resistant pile is made up of different yarns to allow moisture absorption and dirt scraping. Dimensions is a robust, fun and vibrant mat.

The phthalate free PVC backing of the Dimensions mat also protects the

surface beneath against moisture. The combination of strong yarns and special design elements make the Dimensions one of the best entrance mats for keeping buildings free of moisture and dirt, even in heavy traffic areas. Dimensions is available with s-FLX backing.

## s-FLX: the environmentally friendly alternative that is easy to install

We also offer this entrance mat with our revolutionary s-FLX backing. This contains no PVC or plasticisers and is kinder to the environment: 30% reduction in energy consumption and 15% reduction in greenhouse gas emissions over its lifecycle. What's more, the mat is easier to install, as it is lighter and more flexible than one with a PVC backing. Lastly, s-FLX prevents any discolouration of the subfloor.

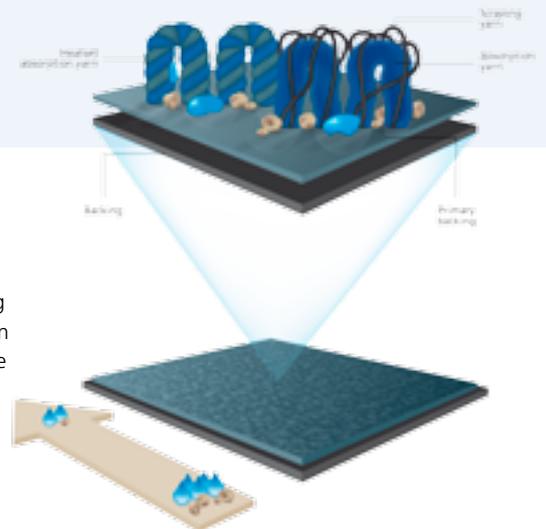



# Dimensions



## Specifications


## PVC

Pile material	100% Polyamide	100% Polyamide
Backing	PVC	<b>PU</b>
Primary backing	nonwoven PET/PA	nonwoven PET/PA
Yarn construction	Bouclé	Bouclé
Pattern	Blended	Blended
Colours	5	5
Pile weight ISO 8543	± 700 g/m <sup>2</sup>	± 700 g/m <sup>2</sup>
Total weight ISO 8543	± 3.600 g/m <sup>2</sup>	<b>± 2.700 g/m<sup>2</sup></b>
Pile height ISO 1766	± 5,5 mm	± 5,5 mm
Total height ISO 1765	± 7,5 mm	± 7,5 mm
Pile density ISO 8543	0,12 g/cm <sup>3</sup>	0,12 g/cm <sup>3</sup>
Number of stitches ISO 1763	± 71.100 /m <sup>2</sup>	± 71.100 /m <sup>2</sup>
Use classification EN 1307	32	32
Wearing class EN 1963	32	32
Comfort EN 1307	LC3	LC3
Suitability for stairs EN 1963	Intensive use	Intensive use
Suitability for castor chairs EN 985	Intensive use	Intensive use
Dimensional stability ISO 2551	< 0,2%	< 0,2%
Light fastness ISO 105 B02	> 7	> 7
Water fastness ISO 105 B01	4 - 5	4 - 5
Rubbing fastness ISO 105 X12	4 - 5	4 - 5
Salt water ISO 105 E02	4 - 5	4 - 5
Shampoo BS 1006	4 - 5	4 - 5
Organic solvents ISO 105 X05	4 - 5	4 - 5
Absorption capacity TNO W6034	± 5,2 l/m <sup>2</sup>	± 5,2 l/m <sup>2</sup>
Flammability Euroclass EN 13501	Cfl/s1	Cfl/s1
Slip Resistance EN 13893	DS	DS
Static charge ISO 6356	-0,7 kV	-0,7 kV
Sand absorption class*	2	2
Optical class**	4,5	4,5
Declaration of Performance	Available	Available
Sizes rolls***	135 & 200 cm 265 cm on request	135 & 200 cm 265 cm on request
Roll length	± 20 m	± 20 m
Sizes mats***	60x90 cm, 90x150 cm & 135x200 cm	60x90 cm, 90x150 cm & 135x200 cm

## Where to use?


	high traffic	medium traffic
Not combined with outdoor matting	<b>A</b>	<b>B</b>
Combined with outdoor matting	<b>C</b>	<b>D</b>
Outdoor matting	<b>E</b>	

## Colours

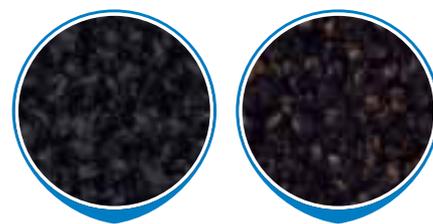

Anthracite 930

Brown 932

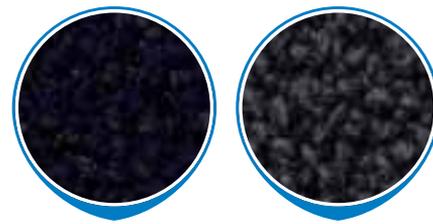

Blue 936

Grey 938



Red 939

\* Sand absorption class 1: =< 80%, Sand absorption class 2: 80% =< class 2 < 90%. Sand absorption class 3: >=90% \*\* Optical class 5 is best, 1 is lowest.  
\*\*\* All mentioned sizes include a 2.5 cm PVC border. The roll lengths that are given are a guideline. The actual length can turn out 15% shorter or longer. Laying and maintenance recommendations can be found on our website.



EN 14041:2004

## Contact us for more information:

Our employees are ready to answer your questions or to take your orders. Call **+31 38 385 35 00**.



# RINOS