


iseo



8043.01 - 8043.18

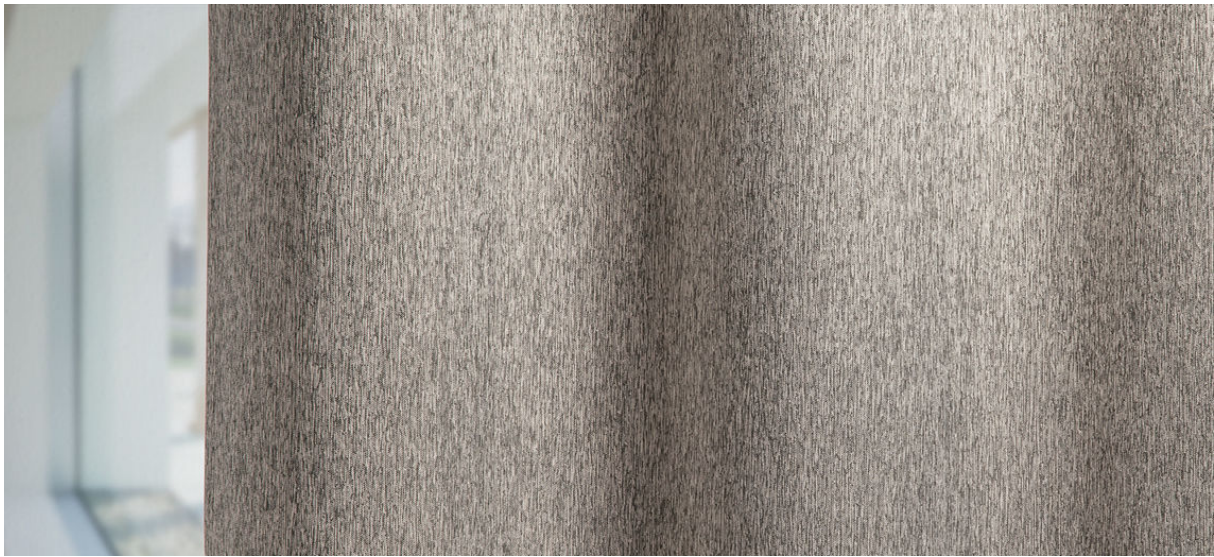

binder

curtain 02

description

ton-sur-ton flowing black out with a satin backing

composition

100% flame retardant polyester

width

± 300 cm, ± 118 inches

weight

± 1030 gr/m¹, ± 33 oz/yd¹ fabrics

sound absorption

ISO 354, alphaw 0.7

thermal & visual comfort

EN 14501

class 4 (scale 1-4)

AATCC 148

100% light blocked

flame retardancy

EN 13773, classe 1

BS 5867 part 2, type C

NF P 92-503-507, M1

DIN 4102 part 1, B1

NFPA 701:2010-1

CAN ULC S109

NFPA 260, classe 1

colorfastness to crocking

ISO 105 X12

wet 4-5 / dry 4-5 (scale 1-5)

AATCC 8

wet 4.5 / dry 4.5 (scale 1-5)

colorfastness to light

ISO 105-B02

light 4 / dark 5-7 (scale 1-8)

AATCC 16.3: 60 hrs

4 (scale 1-5)


care




shrinkage: warp: -1.7% / weft: -1.2%

iseo

8043.01 - 8043.18



8043.18



8043.17



8043.13



8043.11



8043.07



8043.09



8043.06



8043.04




8043.03



8043.15



8043.16



8043.14



8043.12



8043.10



8043.05



8043.08



8043.01



8043.02