




Connection

The Connection is an innovative entrance matting system with dirt scraping and moisture absorbing qualities. Each line in the design performs a separate function. This entrance matting is ideal for moisture absorption and dirt scraping and intensive use.

The Connection can be used in entrance areas, stairwells, pantries and lifts in a range of heavy commercial areas. For example, in commercial premises and medium-sized and large offices.

The Connection's special velour yarn structure consists of different segments which each perform a separate function. One absorbs moisture whilst the other scrapes dirt. The linear pattern acts as a visual barrier against dirt. The yarns used provide maximum resistance.

Tracked-in moisture is not a problem for underlying surfaces thanks to the phthalate-free PVC backing. Connection is the practical and clean-look high performance mat with a specific entrance matting function. Connection is the tasteful moisture absorber and dirt scraper for buildings and high traffic commercial areas.

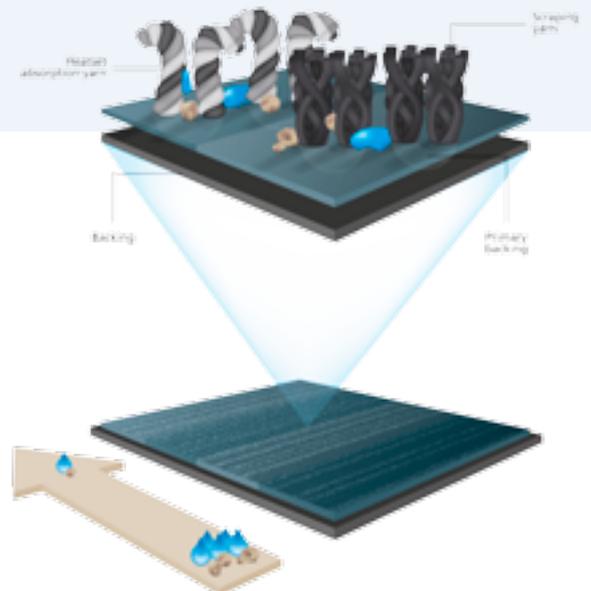



Connection



Specifications


Pile material	100% Polyamide
Backing	PVC
Primary backing	nonwoven PET/PA
Yarn construction	Velour
Pattern	Linear
Colours	4
Pile weight ISO 8543	± 825 g/m ²
Total weight ISO 8543	± 3.525 g/m ²
Pile height ISO 1766	± 6,0 mm
Total height ISO 1765	± 8,0 mm
Pile density ISO 8543	0,146 g/cm ³
Number of stitches ISO 1763	± 125.700 /m ²
Use classification EN 1307	33
Wearing class EN 1963	33
Comfort EN 1307	LC2
Suitability for stairs EN 1963	Intensive use
Suitability for castor chairs EN 985	Intensive use
Dimensional stability ISO 2551	< 0,3%
Light fastness ISO 105 B02	> 7
Water fastness ISO 105 B01	4 - 5
Rubbing fastness ISO 105 X12	4 - 5
Salt water ISO 105 E02	4 - 5
Shampoo BS 1006	4 - 5
Organic solvents ISO 105 X05	4 - 5
Absorption capacity TNO W6034	± 5,6 l/m ²
Flammability Euroclass EN 13501	Cfl/s1
Slip Resistance EN 13893	DS
Static charge ISO 6356	-0,2 kV
Sand absorption class*	3
Optical class**	4
Declaration of Performance	Available
Sizes rolls***	135 & 200 cm 265 cm on request
Roll length	± 20 m
Sizes mats***	60/100 cm, 100/150 cm & 135/205 cm

* Sand absorption class 1: =< 80%, Sand absorption class 2: 80% =< class 2 < 90%. Sand absorption class 3: >=90% ** Optical class 5 is best, 1 is lowest. *** All mentioned sizes include a 2.5 cm PVC border. The roll lengths that are given are a guideline. The actual length can turn out 15% shorter or longer. Laying and maintenance recommendations can be found on our website.

Where to use?


	high traffic	medium traffic
Not combined with outdoor matting	A	B
Combined with outdoor matting	C	D
Outdoor matting	E	

Colours

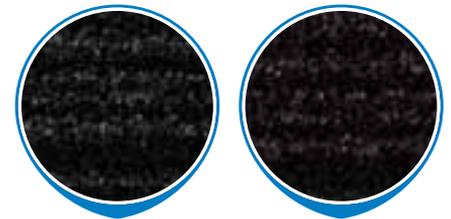

Anthracite 920

Brown 922

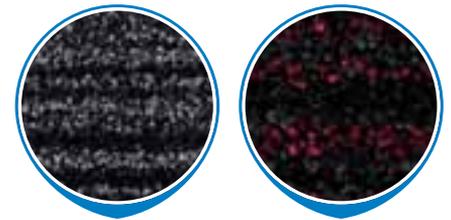

Grey 928

Red 929



EN 14041:2004

Contact us for more information:

Our employees are ready to answer your questions or to take your orders. Call **+31 38 385 35 00**.



RINOS